

Pneumatic Stapler Type 14/50-763

This light, well balanced and rugged heavy duty stapler drives BeA type 14 and type 16 (155) staples in length from 25 to 50 mm. The top loading magazine holds 150 staples. The 14/50-763 stapler has a quick release nose for easy jam clearance. The slender nose affords better operator visibility for more precise fastener placement.



Popular applications:

Expendable pallets, sheathing, roof decking, subflooring, furniture frame assembly.

Length: 334 mm
Width: 70 mm
Height: 244 mm

Technical data

Type description:	14/50-763	14/40-763
Contact	Contact	Single
Article code:	12000257	12000431
Magazine type :	Top loader	Top loader
Safety:	Contact actuation	Single actuation
Fastener type:	Type 14 / type 16 (155)	Type 14 / type 16 (155)
Magazine capacity:	156 / 144	156 / 144
Fasteners per strip:	2 x 75 / 2 x 70	2 x 75 / 2 x 70
Operating pressure:	6 – 8 bar	6 – 8 bar
Max. operating pressure:	8 bar	8 bar
Air consumption/operation:	1.5 litre / 6 bar	1.5 litre / 6 bar
Inner hose diameter:	Ø 9 mm LW recommended	Ø 9 mm LW recommended
Emission sound pressure level at the workstation:	L pA, 1s, d= 90 dB	L pA, 1s, d= 90 dB
Single-shot emission sound pressure level:	L WA, 1 s,d= 97 dB	L WA, 1 s,d= 97 dB
Weight:	2.14 kg	2.14 kg

The vibration as per document no. CEN/TC 255 WG 1 N 47.3 is 3,3 m/s²

Extras supplied with the nailer:

Operating instructions, spare parts list, service instructions, silencer.

Subject to technical modifications.

Accessories:

Article code	Description
14406422	Single actuation set
14403402	Remote valve
14403536	Mounting flange
14406082	Castor, compl.
14406172	Exhaust set
14406552	

All BeA pneumatic tools can be jig-mounted
We supply the necessary accessories and equipments.



This tool conforms to the EG Directive for Machinery (89/392 EWG)


Pneumatic Stapler Type 14/50-763



BeA Deutschland
Befestigungstechnik
P.O.Box 14 80
D-22904 Ahrensburg
Phone: +49 (0) 4102 78-0
Fax: +49 (0) 4102 78-250
www.bea-group.com
e-mail: info@bea-group.com

a division of
Joh. Friedrich Behrens AG

Staples type 14 and type 16 (155)

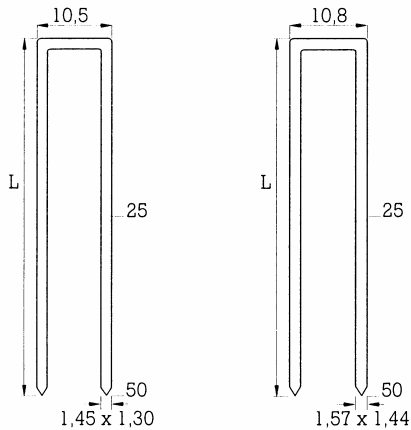

Description	L = Length mm
14/25 NK HZ	25
14/28 NK HZ	28
14/30 NK HZ	30
14/32 NK HZ	32
14/35 NK HZ	35
14/38 NK HZ	38
14/40 NK HZ	40
14/45 NK HZ	45
14/50 NK HZ	50

16/25 NK HZ (155/25)	25
16/28 NK HZ (155/28)	28
16/30 NK HZ (155/30)	30
16/32 NK HZ (155/32)	32
16/35 NK HZ (155/35)	35
16/38 NK HZ (155/38)	38
16/40 NK HZ (155/40)	40
16/45 NK HZ (155/45)	45
16/50 NK HZ (155/50)	50

Staples type 16 (155) also available in NR HZ and VZ HZ.
Other lengths and finishes are also available on request.

Explanations:

NK = galvanized steel	BK = bright steel	LM = aluminium	HZ = resin coated
NKS = galvanized steel, extra hard	BKS = bright steel, extra hard	NR = stainless steel, material. 1.4401	DP = divergent point
NKH = galvanized steel, hard	MS = brass	RF = rust resistant, material 1.4301	SA = step cut