


## Pneumatic Stapler Type 14/32-613 Nosag

The BeA 14/32-613 Nosag drives staples type 14 and 16 (155) in leg length from 12 – 32mm. It is a lightweight and particularly well balanced tool with an integrated silencer. The special attachment makes the tool a valuable asset such as fastening spring (Nosag) clips in furniture assembly. The recommended leg length for this application is 25 mm.

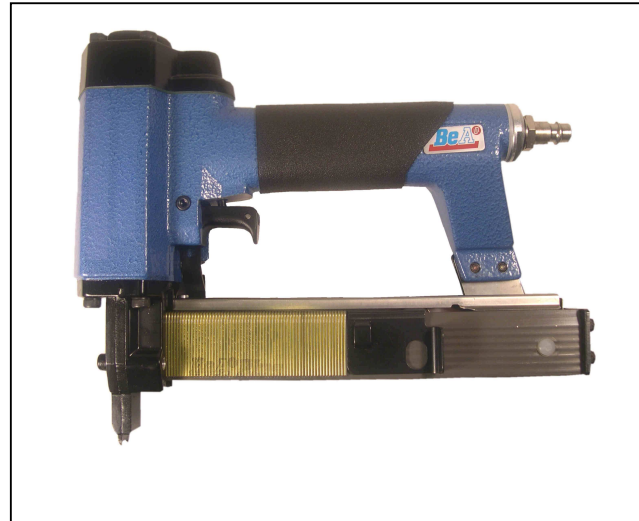

### Popular applications:

#### Anwendungsbereiche

Fastening of spring (Nosag)-clips in furniture assembly

Length: 247 mm  
Width: 56 mm  
Height: 205 mm

### Technical data

Type description:	<b>14/3-163 Nosag</b>
Article code:	12200069
Magazine type :	Top loader
Safety:	Contact
Fastener type:	Type 14 and 155
Magazine capacity:	110
Fasteners per strip:	1 x 75 type 14 1 x 70 type 155
Operating pressure:	5 – 8 bar
Max. operating pressure:	8 bar
Air consumption/operation:	0.9 litre / 6 bar
Inner hose diameter:	Ø 9 mm LW recommended
Emission sound pressure level at the workstation:	L pA, 1s, d= 79 dB
Single-shot emission sound pressure level:	L WA, 1 s,d= 87 dB
Weight:	1.5 kg

The vibration as per document no. CEN/TC 255 WG 1 N 47.3 is under the declaration limit as per EN 292-1, amendment A.

### Extras supplied with the nailer:

Operating instructions, spare parts list, service instructions, silencer.

Subject to technical modifications.

All BeA pneumatic tools can be jig-mounted  
We supply the necessary accessories and equipments.



This tool conforms to the EG Directive  
for Machinery (89/392 EWG)


## Pneumatic Stapler Type 14/32-163 Nosag



BeA Deutschland  
Befestigungstechnik  
P.O.Box 14 80  
D-22904 Ahrensburg  
Phone: (04102) 78-0  
Fax: (04102) 78-250  
www.bea-group.com  
e-mail: [info@bea-group.com](mailto:info@bea-group.com)

a division of  
Joh. Friedrich Behrens AG

Staples type 14 and type 16 (155)

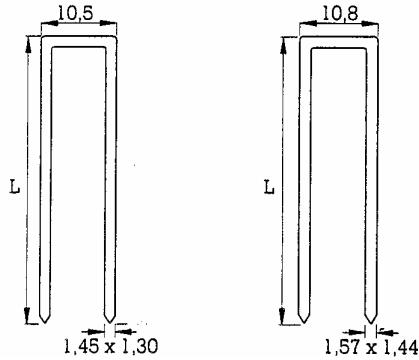

Recommended leg length 25 mm

Description	L = Length mm
14/25 NK HZ	25
16/25 NK HZ (155/25)	25

Other lengths and finishes are also available on request.

**Explanations:**

NK = galvanized steel	BK = bright steel	LM = aluminium	HZ = resin coated
NKS = galvanized steel, extra hard	BKS = bright steel, extra hard	NR = stainless steel, material. 1.4401	DP = divergent point
NKH = galvanized steel, hard	MS = brass	RF = rust resistant, material 1.4301	SA = step cut